




YR-603I 電熱式烘乾機 INDUCTION POST CURING

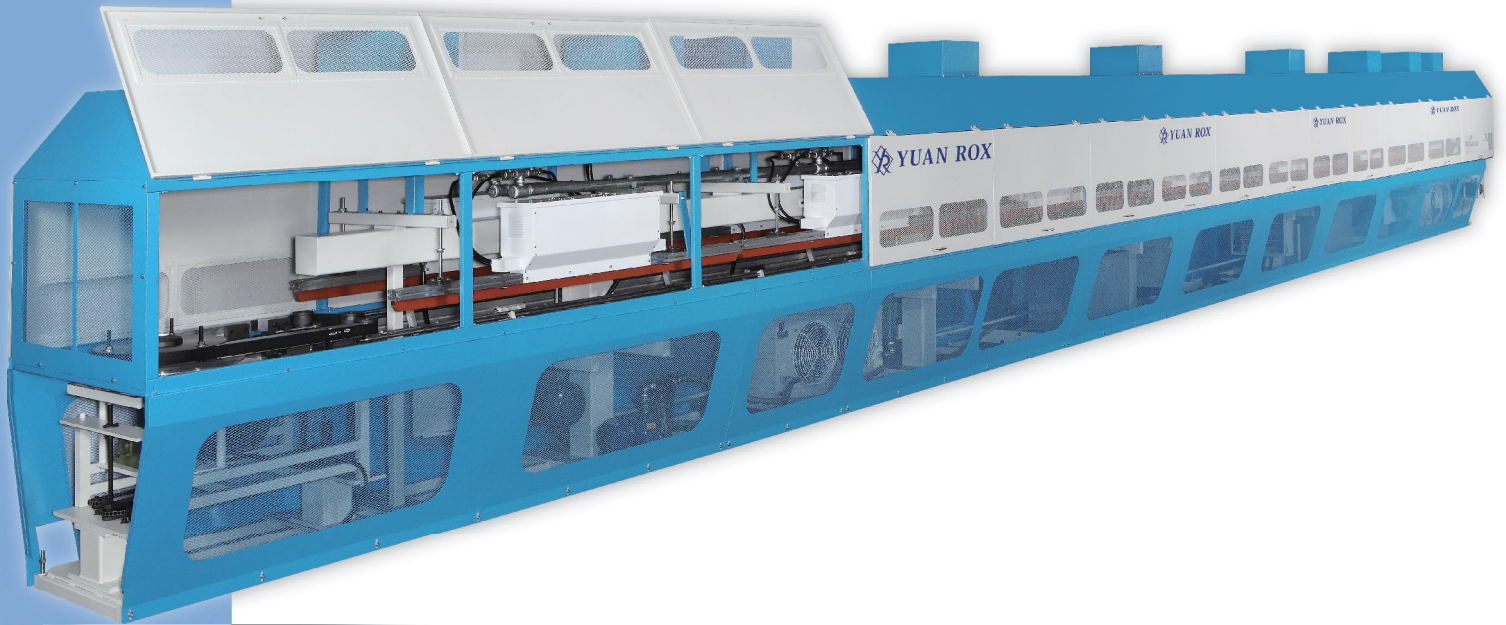

CAN BODY PRODUCTION EQUIPMENT BY YUAN ROX SINCE 1980

物超所值—提供知識技術的服務 快速反應零件補給

Value for Money

Knowledge and Technology Services

Rapid Response Parts Supply

台灣省台中市太平區新仁路一段22巷69號
TEL:886-4-22755011 ; FAX:886-4-22754464
NO 69, LANE 22, SEC. 1, HSIN JEN RD.
TAI-PING DISTRICT, TAICHUNG 411 TAIWAN
E-MAIL: yuanrox@ms15.hinet.net
HTTP:www.yuanrox.com

YUAN ROX MACHINERY CO., LTD.

- 罐徑範圍 BODY DIAMETER RANGE : #202D - #401D OR #401D - #710 D
- 罐高範圍 BODY HEIGHT RANGE : 38 - 320 MM
- 速度 SPEED : 12- 85 M/MIN
- 每組電熱器電力需求 HEAT ZONE POWER CONSUMPTION : 5 KVA / SET
- 每支電熱器長度 EACH HEAT ZONE LENGTH : 2 M
- 每支電磁頭消耗量2000瓦 約2度/小時
EACH ELECTRONIC HEAD CONSUMPTION 2000KW(ABOUT 2 DEGREE/HOUR)
- 輸出顯示系統 OUTPUT DISPLAY SYSTEM
- 直線式或U型皮帶式烘乾機 LINEAR OR U SHAPE BELT CONVEYOR
- 自動感應系統(罐子沒來不加熱) AUTO SENSOR (NO CAN NO ON)

U SHAPE SERIAL

MODEL : YR-603I-XXUP

HEAT ZONE NUMBERS	ACTIVE CURING LENGTH	TOTAL LENGTH
10 PCS	20.0 METER	11.6 METER
12 PCS	24.0 METER	13.6 METER
14 PCS	28.0 METER	15.6 METER


LINEAR SERIAL

MODEL : YR-603I-XXSP

HEAT ZONE NUMBERS	ACTIVE CURING LENGTH	TOTAL LENGTH
4 PCS	8.0 METER	9.6 METER
5 PCS	10.0 METER	11.6 METER
6 PCS	12.0 METER	13.6 METER

CAN BODY PRODUCTION EQUIPMENT BY YUAN ROX SINCE 1980

All specifications, and design characteristics shown in this catalogue are subject to change without notice.
由於本公司不斷的研究改進, 本型錄所示之機械規格特性, 本公司有變更之權利, 恕不另行通知。

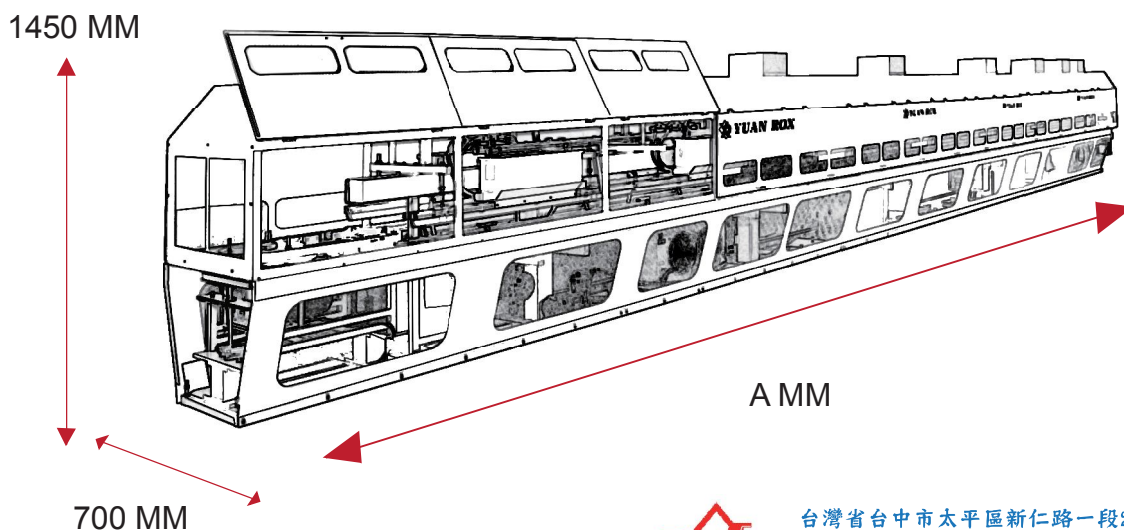

台灣省台中市太平區新仁路一段22巷69號
TEL:886-4-22755011 ; FAX:886-4-22754464
NO 69, LANE 22, SEC. 1, HSIN JEN RD.
TAI-PING DISTRICT, TAICHUNG 411 TAIWAN
E-MAIL: yuanrox@ms15.hinet.net
HTTP:www.yuanrox.com